Flush Mount Kit WSFB 50V

Mounting

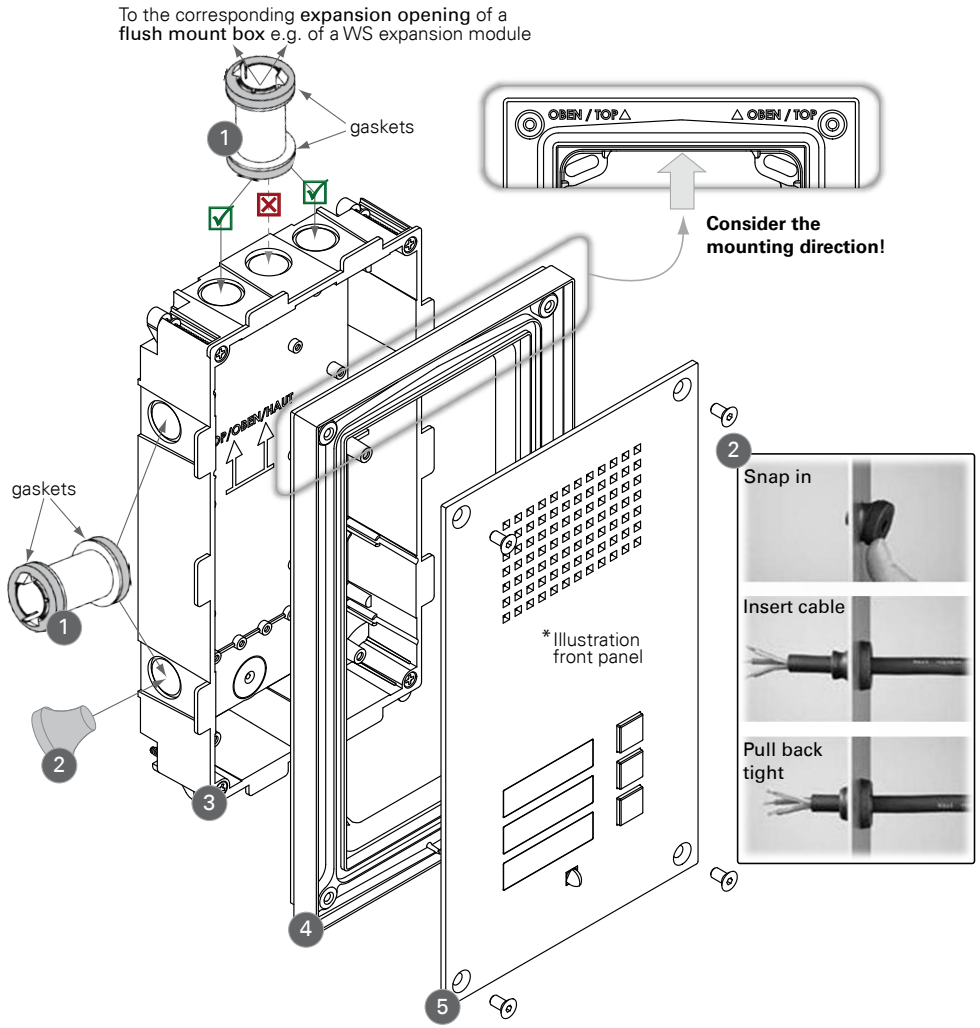

1 ..... **Connection spacer (with gaskets) for connecting two flush mount boxes and for cable feed through**
→ When mounting the device to the top or bottom side of a WS station or an expansion module, the connection spacer in the extent of supply has to be mounted to the outer expansion openings (see above)
→ Make sure the connection spacer is snaped-in correctly in the expansion opening!

2 ..... **IP66 cable feed through**
→ Put in cable feed through after breaking out the expansion openings (installation cable feed through, see above)

3 ..... **Flush mount box (polycarbonate)**
→ For cavity wall mounting or installation in a panel, use cavity wall claws (wall thickness: 2 – 30 mm / 0.08 – 1.18 in)

4 ..... **Mounting frame (metal) incl. gasket**
→ Screw mounting frame onto the flush mount box (screws in extent of supply)

5 ..... **Front panel (metal) with station electronics**
→ Screw front panel onto mounting frame

Dimensions

Measuring units in mm (inch), not to scale! Cutout for flush mount box: 136 (5.36) x 252 (9.92)

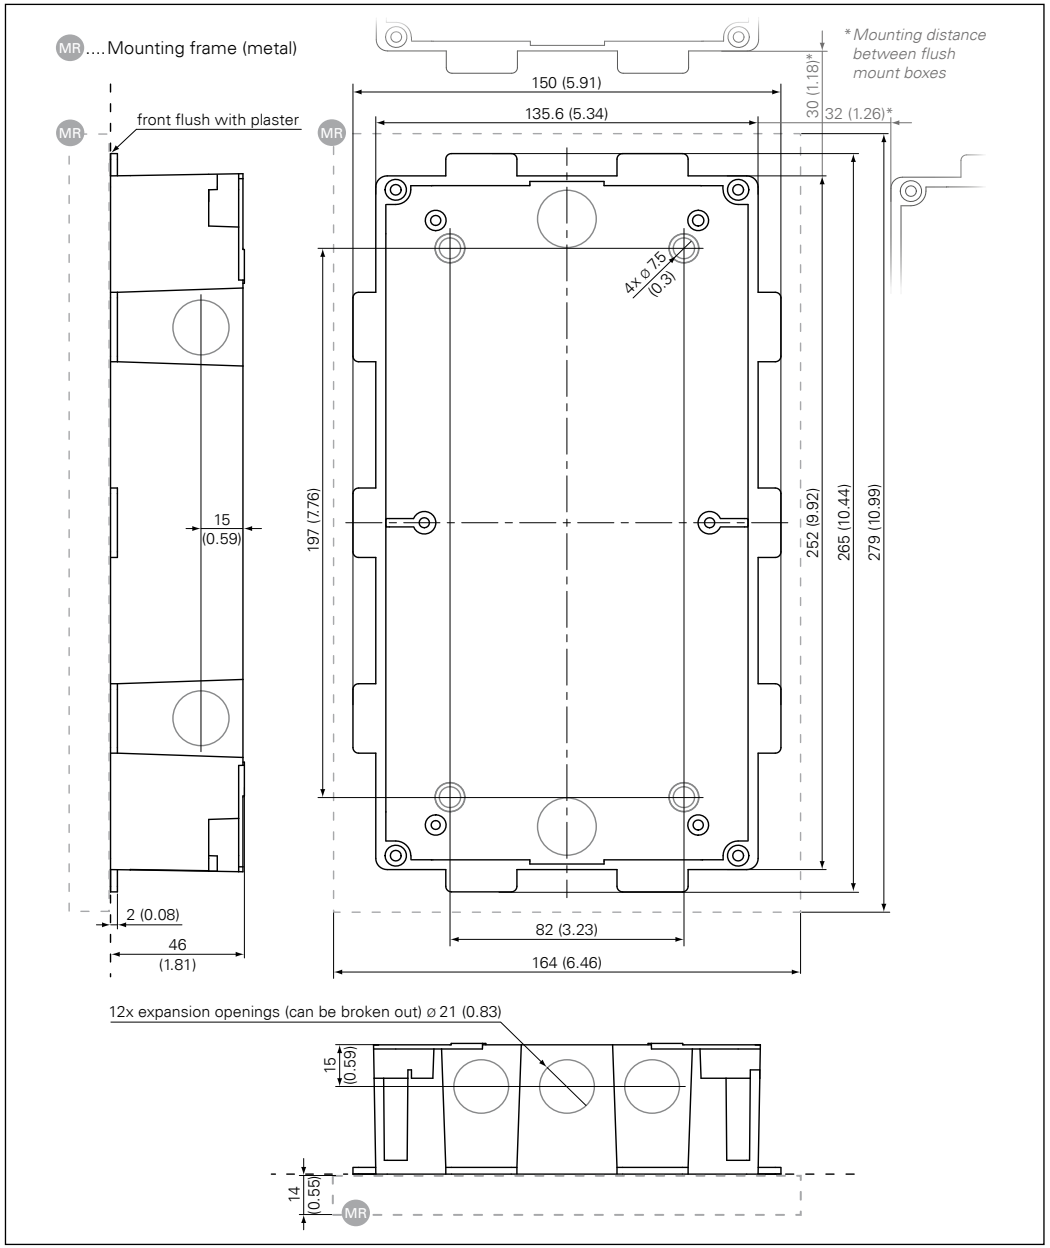

Manufacturer's reference

The components may be only installed by authorised engineers.
Keep this description in safe custody!

Unterputz-Kit WSFB 50V

Montage

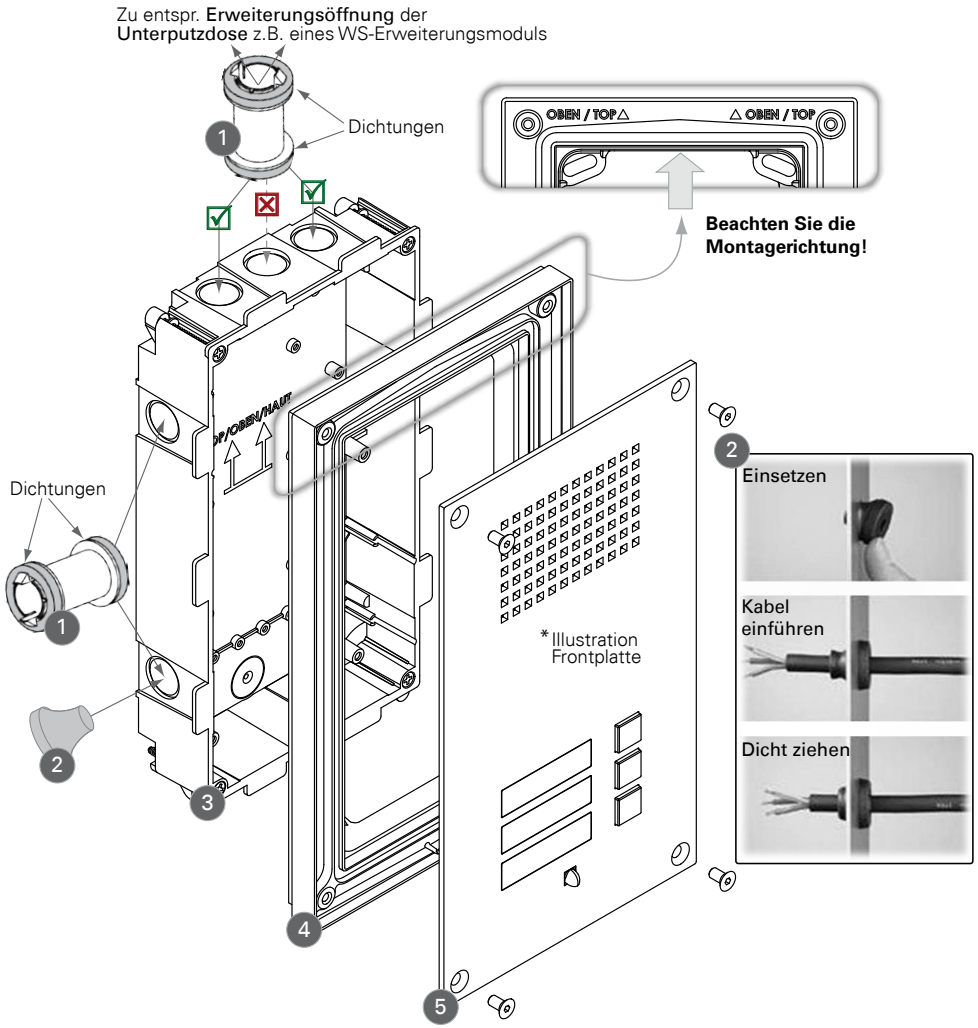

1 ..... **Verbindungshülse (mit Dichtungen) für das Verbinden zweier Unterputzdosen miteinander sowie für das Durchführen von Kabeln**
- → Bei Verbindung mit einer WS-Sprechstelle oder einem Erweiterungsmodul an der Ober- oder Unterseite, müssen die mitgelieferten Verbindungshülsen an den äußeren beiden Erweiterungsöffnungen montiert werden (siehe oben)
- → Auf richtiges Einrasten der Verbindungshülse in der Erweiterungsöffnung achten!

2 ..... **IP66-Kabeldurchführung**
- → Die Kabeldurchführungen können nach Herausbrechen der Erweiterungsöffnungen eingesteckt werden

3 ..... **Unterputzdose (Kunststoff)**
- → Bei Hohlwandmontage oder Pulteinbau sind Hohlwandkrallen zu verwenden (Wandstärke: 2 – 30 mm)

4 ..... **Montagerahmen (Metall) inkl. Dichtung**
- → Montage durch Verschraubung mit Unterputzdose (Schrauben im Lieferumfang enthalten)

5 ..... **Frontplatte Metall mit Sprechstellen-Elektronik**
- → Montage durch Verschraubung mit Montagerahmen

Maßzeichnung

Maße in mm, kein Maßstab! Dosen-Ausschnittsmaß: 136 x 252

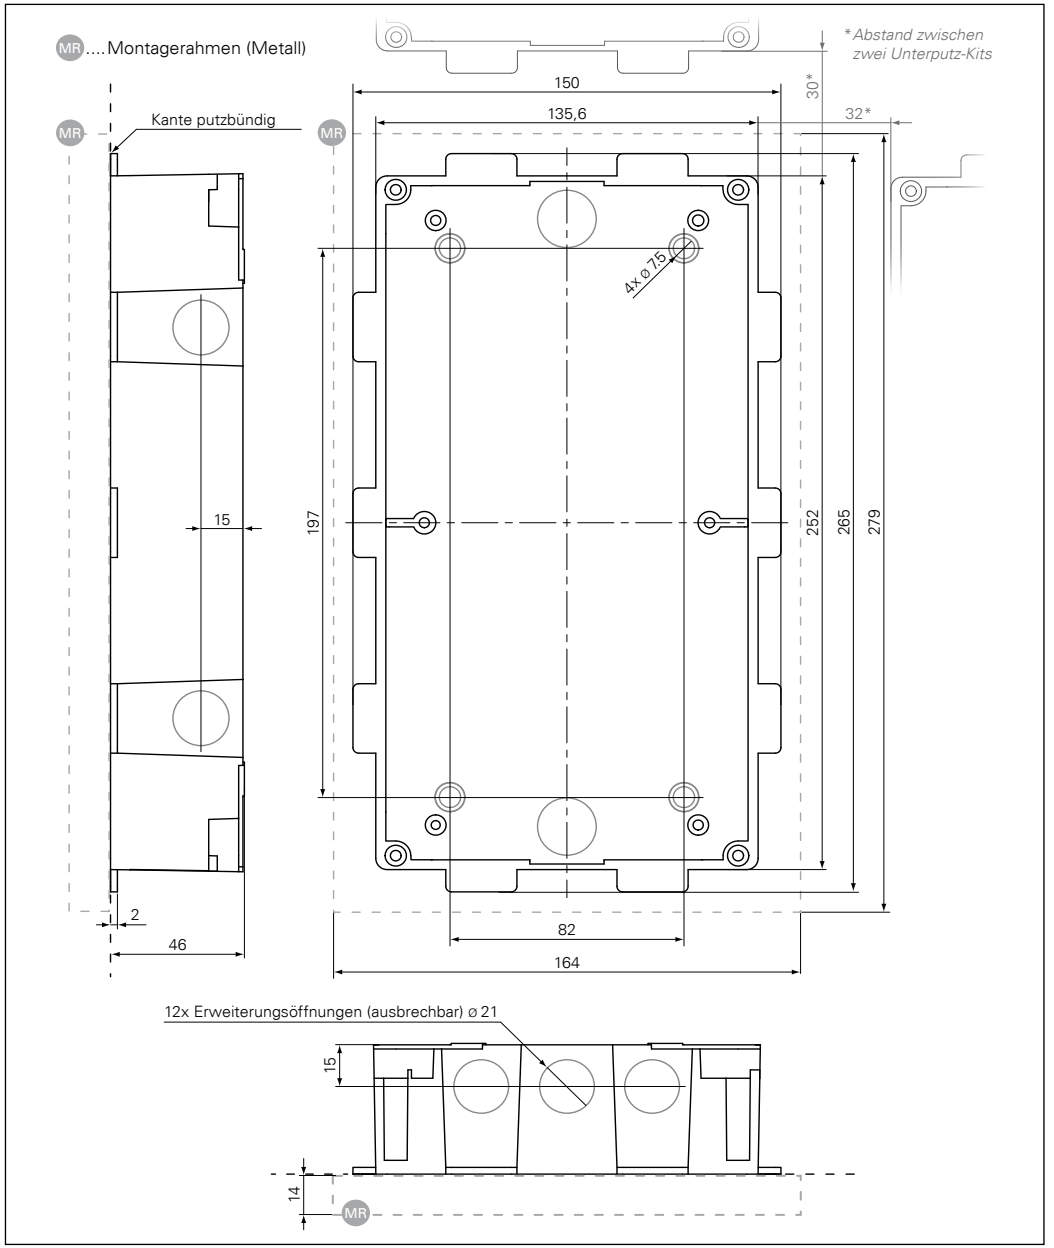

Hinweis des Herstellers

Die Komponenten dürfen nur von autorisiertem Fachpersonal installiert werden. Bewahren Sie diese Beschreibung sorgfältig auf!